



KEY FEATURES

- High output direct radiating single 18" Subwoofer
- 600W RMS power handling
- 126dB SPL continuous and 132dB SPL peak
- Vented Enclosure
- European 18" LF driver
- Birch plywood CNC cabinet
- Touring grade coating with textured black mat finish
- Provision for pole mounting top

APPLICATIONS


The QX 118s is a Single 18" High output Subwoofer for bass reinforcement suitable for

- Medium to large scale PA systems
- Touring systems
- Permanent installation in large Club, Theater, Auditorium and other indoor venues
- DJ and mobile applications
- Side fills on stage

SPECIFICATIONS

| | |
|------------------------------------|---|
| System Power Handling | 600W RMS 1200W Program / 2400W Peak |
| Nominal impedance | 8 ohms |
| Frequency response -6dB half space | 38Hz - 1300Hz |
| Average Sensitivity | 97dB/W/m |
| Calculated Maximum SPL / 1m | 124dB continuous 127dB Program 130dB Peak |
| Recommended low cut filter | 36Hz 24dB/oct |
| Recommended amplifier | Up to 1200W (no clip) |
| | LF Custom Premium 1x18" (3" VC) |
| Connectors | NEUTRIK Speakon NL4 |
| Pole mount | 35mm top hat |
| Cabinet | CNC made with tongue & groove assembly 15 and 18mm Russian birch plywood |
| Finish | Touring grade coating with textured black mat finish |
| Size (WxHxD) | 563x590x692mm 22.2"x23.2"x27.2" |
| Net weight | 39kg (86.0lbs) |

DRAWING

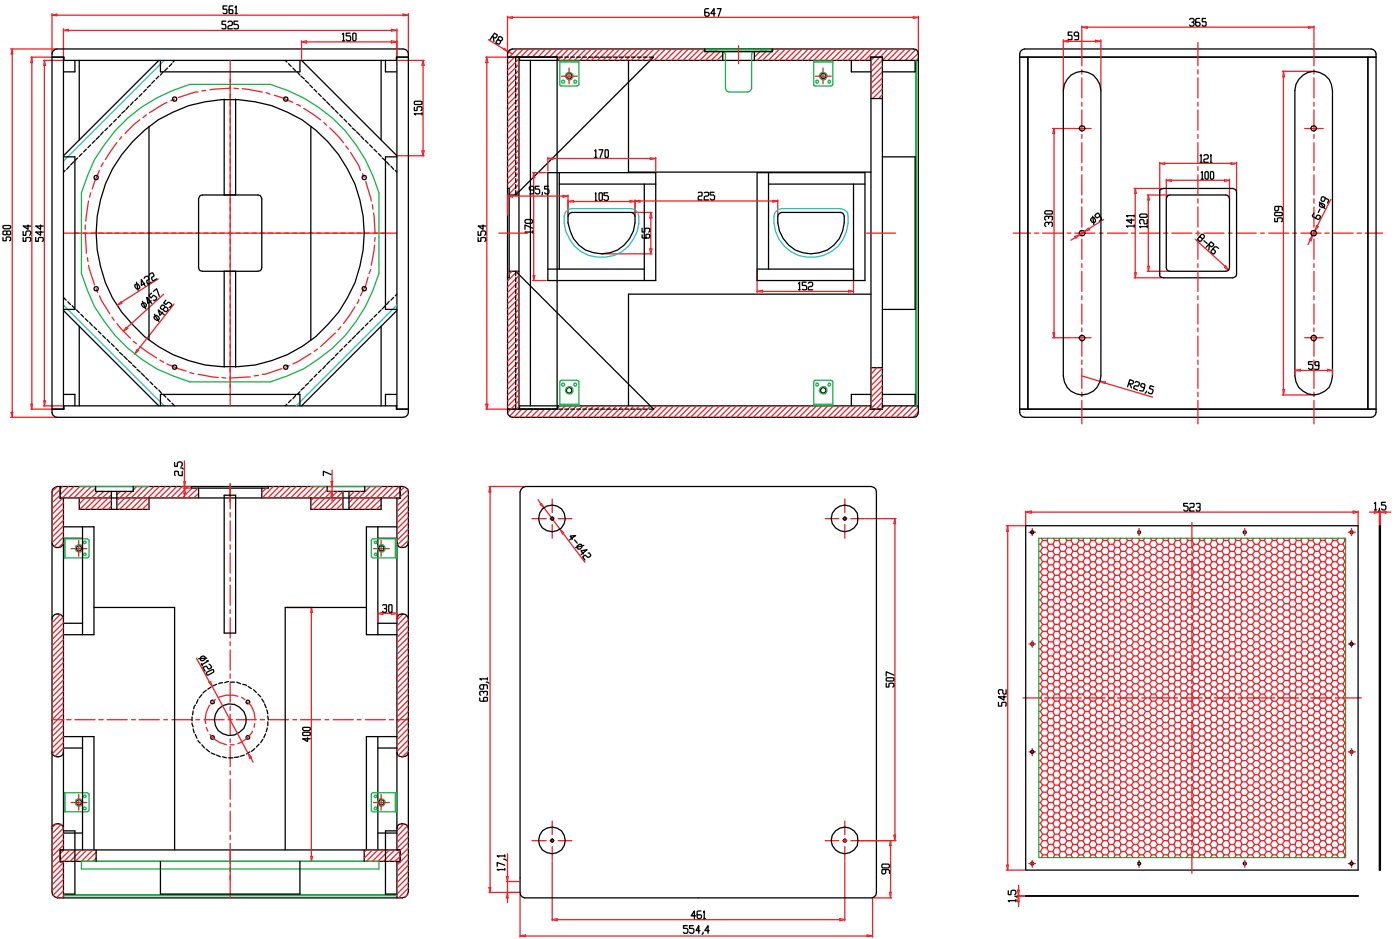

WIRING

