



KEY FEATURES

- High output dual 18" Subwoofer
- 1200W RMS power handling
- 130dB SPL continuous and 136dB SPL peak Output
- Vented Enclosure
- European 18" LF driver
- Birch plywood CNC cabinet
- Touring grade coating with textured black mat finish
- Can be used horizontally as well as vertically
- Provision for pole mounting top

APPLICATIONS


The QX 218s is a Dual 18" High output Subwoofer for bass reinforcement suitable for

- Medium to large scale PA systems
- Touring systems
- Permanent installation in large Club, Theater, Auditorium and other indoor venues
- DJ and mobile applications
- Side fills on stage

SPECIFICATIONS

System Power Handling	1200W RMS 2400W Program / 4800W Peak
Nominal impedance	4 ohms
Frequency response -6dB half space	39Hz - 1500Hz
Average Sensitivity	100dB/W/m
Calculated Maximum SPL / 1m	130dB continuous 133dB Program 136dB Peak
Recommended low cut filter	35Hz 24dB/oct
Recommended amplifier	Up to 2400W (no clip)
	LF Custom Premium 2x18" (3" VC)
Connectors	NEUTRIK Speakon NL4
Pole mount	35mm top hat
Cabinet	CNC made with tongue & grove assembly 15 and 18mm Russian birch plywood
Finish	Touring grade coating with textured black mat finish
Size (WxHxD)	1150x590x692mm 45.3"x23.2"x27.2"
Net weight	74kg (163.1lbs)

DRAWING

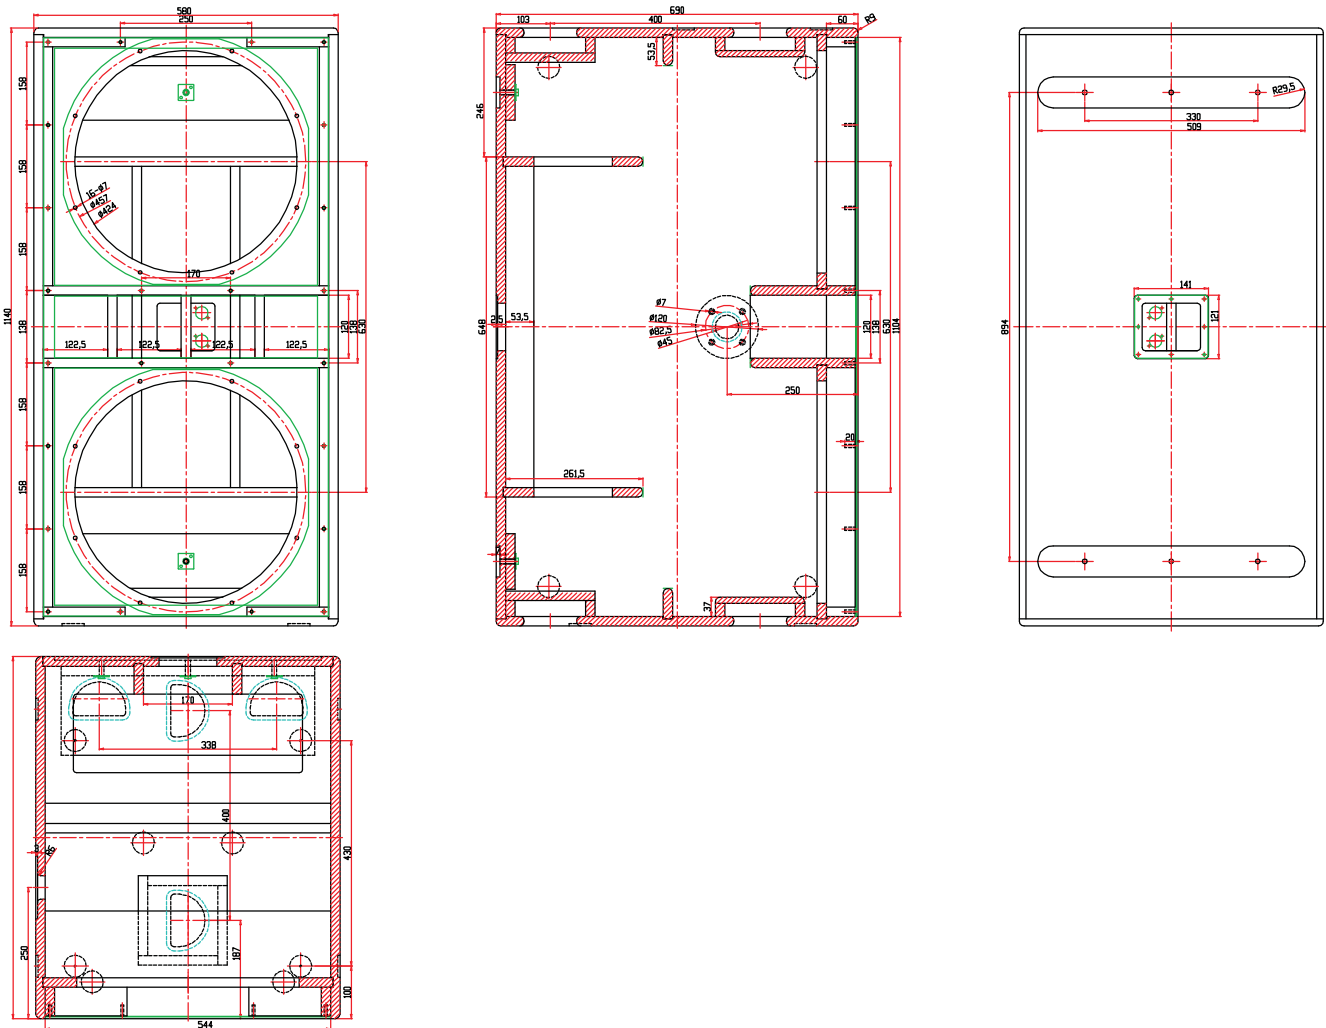

QX 218s

WIRING

